


CEILING-MOUNTED WIRELESS DAYLIGHT SENSOR (ALCM-W-PC)

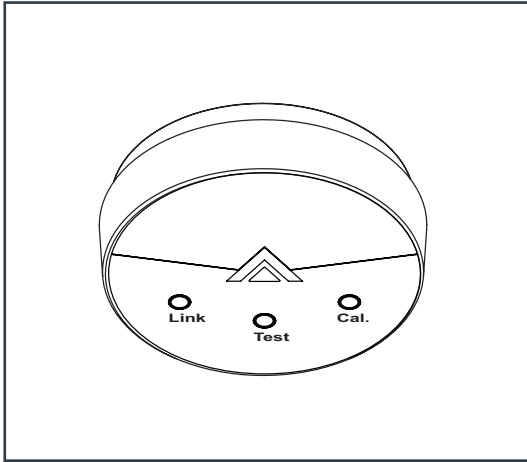

APPLICATIONS

- Small offices • Conference rooms • Lounges • Classrooms

SPECIFICATIONS

ELECTRICAL	
Regulatory Approvals	• Lutron Quality Systems Registered to ISO 9001:2008
Standards	<ul style="list-style-type: none"> • FCC certified • IC certified • COFETEL • ANATEL • ASEP • CRC • SUBTEL • SUPERTEL • SUTEL • Meets CA (U.S.A.) Energy Commission Title 24 requirements • cULus Listed • RoHS compliant
Range	Local load controls must be located within 60ft (18m) in-line-of-sight, or 30ft (9m) through walls, of a sensor
Power/Performance	<ul style="list-style-type: none"> • Operating voltage: 3V⁻⁻⁻ • Operating current: 7μA • Requires one CR 2450 lithium battery • 10-year battery life • Non-volatile memory (settings are stored during power loss)
ENVIRONMENTAL	
Ambient Operating Temperature	32°F to 104°F (0°C to 40°C)
Relative Humidity	< 90% non-condensing; indoor use only



OVERVIEW


The Ceiling-Mounted Wireless Daylight Sensor is a battery-powered sensor that automatically controls lights via RF communication to compatible dimming or switching devices. This sensor mounts to the ceiling and measures light in the space. The sensor then transmits the light level to the associated dimming or switching devices that automatically control the lights to balance light level in the space. The sensor combines both convenience and exceptional energy savings potential along with ease of installation.

All wireless controls are also compatible with the wireless hub which provides a simple setup process using a standard web browser on any Wi-Fi enabled phone, tablet or computer. The hub enables control and monitoring of all wireless devices. The hub can be added at any time. System reprogramming required.

FEATURES

- Wireless daylight sensor has simple calibration
- Daylight compensation through Lutron reliable open loop control
- Designed to give a linear response to changes in viewed light level
- Light range 0 to 150fc (0 to 1600lx)
- Uses Lutron Clear Connect Technology
- Works with wireless occupancy/vacancy sensors and wireless switches
- Intuitive test mode provides instant system verification
- Multiple ceiling-mount methods available for different ceiling materials
- Front accessible test buttons make setup easy
- On a single-tap, lights fade ON or OFF, on a double-tap, lights go to full ON.
- 10-year battery life

DIMENSIONS

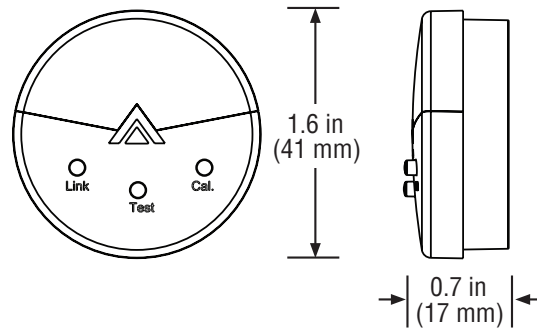

ORDERING INFORMATION

PART NO.	CAT. NO.	DESCRIPTION
624090	ALCM-W-PC	Ceiling-Mounted Wireless Daylight Sensor (Photocell)



CEILING-MOUNTED WIRELESS DAYLIGHT SENSOR (ALCM-W-PC)

INSTALLATION OVERVIEW


Determine the Daylight Sensor mounting location using the diagrams (right)

- The arrow on the daylight sensor points toward the area viewed by the sensor.
- Place the daylight sensor so the arrow is pointed at the nearest window at a distance from the window of one to two times the effective window height (H).
- The effective window height (H) starts at the window sill or 3 ft (1 m) up from the floor, whichever is higher, and ends at the top of the window.
- Ensure that the view of the daylight sensor is not obstructed (e.g. ceiling fans or pendant fixtures).
- Do not position the daylight sensor above an electric light that shines up at the ceiling or at the sensor.
- Do not position the daylight sensor in the well of a skylight or above indirect lighting fixtures.
- For narrow areas where the daylight sensor cannot be placed 1-2 (H) from windows, place sensor near windows facing into the space.
- Mount sensor(s) away from large metal surfaces (e.g. light fixtures or metal-backed ceiling tiles). Metal objects will affect the RF performance of the sensor.

MOUNTING

Location for average size areas


(Arrow on sensor points towards the area viewed by the sensor (towards the window))

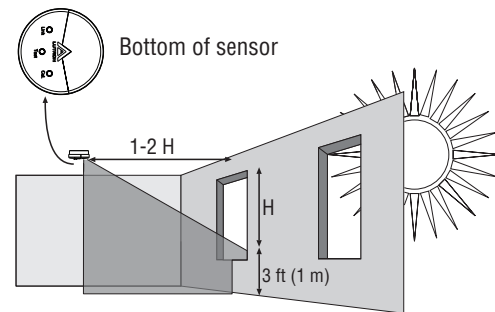

H = Effective Window Height

Location for narrow areas

Arrow on sensor points towards the area viewed by the sensor (away the window)

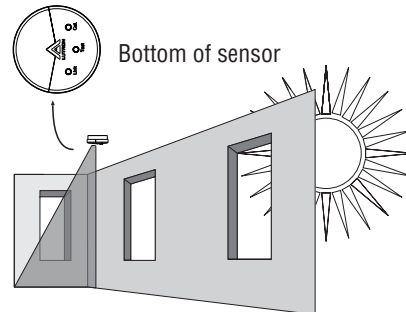

Lutron and Clear Connect are trademarks of Lutron Electronics Co., Inc., registered in the U.S. and other countries, used under license. XCT is a trademark of Lutron Electronics Co., Inc., used under license. The designs of the Pico wireless remote control and the wireless hub shown in this document are trademarks of Lutron Electronics Co., Inc., used under license.



Project Name _____ Catalog # _____

1-800-436-7800 (Support, Option 8) www.lsi-airlink.com

04/25/17

© 2017
LSI INDUSTRIES INC.